



# RIG 448

## 1500 m/4,920 ft

### Savanna Drilling

Total loads: 8 (coil and BHA only)  
 Total loads winter: 9 (coil and BHA only)

The number of rig loads may vary depending on road bans, various county restrictions and non-standard rig inventory

**COIL TUBING UNIT**

Single 70' mast (7/8" drill line)  
 Static hook load: 100,000 lbs/44 500 daN (6 lines)  
 Trailer mounted substructure on 16 wheel trailer  
 FDS 50T top drive with grabber box (6600 ft/lbs of torque)  
 Cummins QSM 11 floor motor 350HP  
 FDS 80K injector (2 7/8" or 3 1/2" tubing capability depending on rig)  
 Storage reel capacity: (2 7/8"=1350 m and 3 1/2"=1200 m)  
 Rotary table with 13 7/8" opening, 1600 ft/lbs torque, 44 550 daN

**DOGHOUSE**

Water tank volume: 1,400 ft<sup>3</sup>/40 m<sup>3</sup>/252 bbl  
 Control panel for all rig functions  
 Tool house and oil storage

**CATWALK**

Remote controlled hydraulic functions level catwalk, racks and lifts V-door  
 Remote controlled hydraulic functions move pipe up and down V-door and across catwalk  
 Built in pipe tub can hold 492 ft/150 m of tubulars

**COMBINATION BUILDING**

275 kW generator (480 v/208 v)  
 2,400 gal/9000 L diesel fuel tank  
 350 psi air compressor (purging coil)  
 Change shack  
 80 gal, 5 station, 8 bottle accumulator with PLC remote

**MUD TANKS**

Swaco Mongoose shaker  
 3 x 2 manifold 3000 psi  
 Mix pump, mixing guns in all tanks, poor boy degasser  
 Trip tank volume: 134 ft<sup>3</sup>/3.8 m<sup>3</sup>/24 bbl  
 Suction tank volume: 403 ft<sup>3</sup>/11.4 m<sup>3</sup>/72 bbl  
 Settling tank volume: 403 ft<sup>3</sup>/11.4 m<sup>3</sup>/72 bbl  
 Shaker tank volume: 532 ft<sup>3</sup>/14.8 m<sup>3</sup>/93 bbl  
 Total active volume: 1,462 ft<sup>3</sup>/41.4 m<sup>3</sup>/260 bbl

**MUD PUMP**

F-800 triplex mud pump with 9" stroke  
 3000 psi piping system with 3" discharge  
 Detroit Diesel engine: Series 2000 or Series 60  
 150 psi air compressor, tool board and parts cabinet

**FLARE TANK**

283 ft<sup>3</sup>/8 m<sup>3</sup>/50 bbl tank  
 Storage on front and back of trailer  
 164 ft/50 m each of 3" flare line and 6" degasser line

**WINTERIZATION**

80 hp boiler  
 1,900 gal/7000 L diesel fuel tank  
 Steam lines and pre-fabs for rig

**TUBULARS**


Each rig typically carries 8 x 4 3/4" drill collars and 15 x 3 1/2" drill pipe  
 Rigs can carry up to 3,900 ft/1200 m of range II 3 1/2" drill pipe in hydraulic pipe tubs or on pipe racks  
 Specific rig inventory available upon request

**RIG MANAGER SHACK**

42' shack with parts storage and crew bathroom

**WELL CONTROL**

3000 psi class 3 BOP  
 Size of BOP depends on specific rig inventory

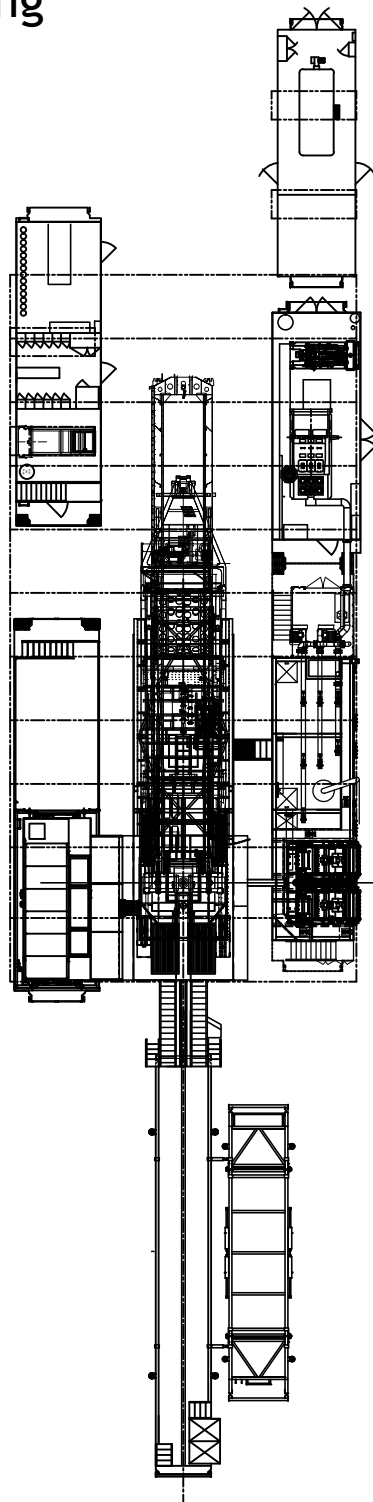

AFE # \_\_\_\_\_

△	02/16/11	UPDATED TITLEBLOCK	CAA		
REV#	DATE	DESCRIPTION	REV'D BY	CHK'D BY	AUTH'D BY
THE INFORMATION INCLUDED IN THIS DOCUMENT IS PROPRIETARY AND SHALL NOT BE REPRODUCED, TRANSFERRED OR DISCLOSED TO OTHERS, FOR ANY PURPOSE WHATSOEVER, WITHOUT THE WRITTEN AUTHORIZATION OF SAVANNA ENERGY SERVICES CORP.					



**SAVANNA ENERGY SERVICES CORP.**  
 SUITE 1800, 311-6TH AVENUE SW  
 CALGARY, ALBERTA T2P 3H2  
 P • 403-503-9990 F • 403-503-0654  
 WWW.SAVANNAENERGY.COM

SCALE:	TITLE:	Rig Layout (1500m/4920ft)			
1/8" = 1'-0"	DRAWN BY:	NLM	CHK'D BY:	AUTH'D BY:	
TITLEBLOCK:	CLIENT:	DRILLING	RIG:	448	
T96	DATE:	02/09/09	DWG #:	SV101L448LO	
	REV #:			1	