RIG 310
477 m/1,565 ft

Savanna Drilling

RIG
1979 Crane Carrier Company (CCC) - GVW 31,100 KG
18" Gardner Denver Rotary Table
Single Stiff Mast: 58'/17.68 m Clear Height
Static Hook Load: 45,000 lbs/20,000 daN (6 lines)
Overall Length: 61' 8"/18.80 m - Crown Overhang: 19' 6"/5.94 m
Height: 15' 4"/4.67 m
Wheelbase: 23' 1"/7.04 m

DOGHOUSE/GENERATOR
Height: 14' 5"/4.39 m (Ground to Top of Building)
175 kW Generator (120 v/208 v)
Tri Axle Step Deck Trailer
Core Bench
Storage on Trailer Gooseneck

MUD PUMP/GENERATOR
Height: 13' 6"/4.11 m (Ground to Top of Building)
175 kW Generator (120 v/208 v)
Tri Axle Step Deck Trailer
Storage on Trailer Gooseneck
D-375/Series 60 Detroit Diesel Engine
150 psi Air Compressor
Day Tank

PUSH SHACK/GENERATOR
Height: 16' 10"/5.13 m (Ground to Top of Building)
175 kW Newage Generator (120 v/208 v)

PIPE TRAILER
Height: 13' 6"/4.11 m
Tri Axle Step Deck Trailer
Storage on Trailer Gooseneck

MUD TANKS
Height: 13' 4"/4.06 m
Total Volume: 564 ft³/15.99 m³/100 bbl
Pressure Washer

WINTERIZATION
Williams & Davis Boiler (60 hp)
Fuel Tank Volume: 225 ft³/6.37 m³/40 bbl
Water Tank Volume: 512 ft³/14.5 m³/91 bbl
Storage on Trailer Gooseneck

TUBULARS
200m x 4 1/2" IF Drill Pipe
6 1/4" DC x 4

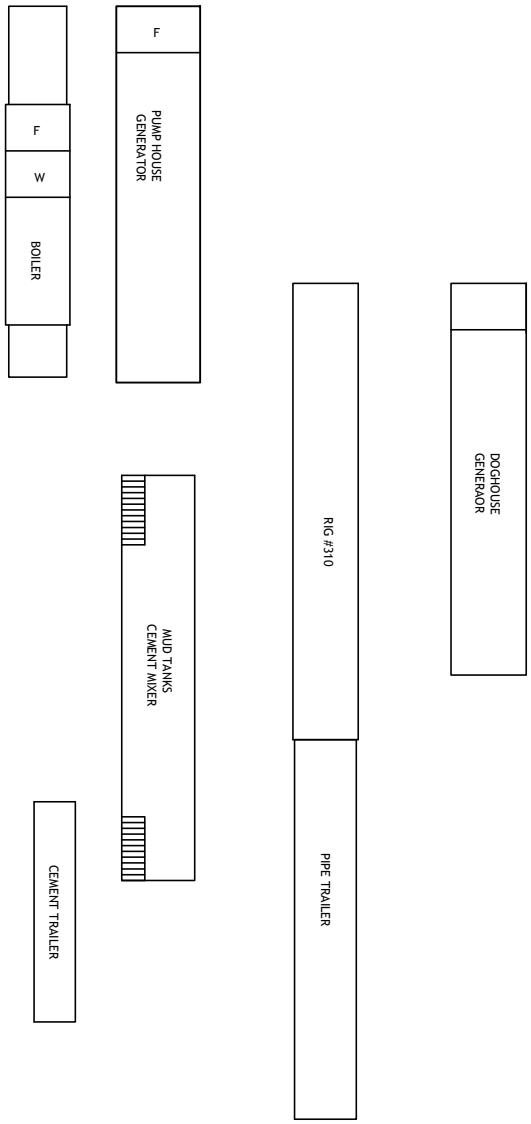

AFE #_____

REV#	DATE	DESCRIPTION	REV'D BY	CHK'D BY	AUTH'D BY
1	02/14/11	UPDATED TITLEBLOCK	CAA		

THE INFORMATION INCLUDED IN THIS DOCUMENT IS PROPRIETARY AND SHALL NOT BE REPRODUCED, TRANSFERRED OR DISCLOSED TO OTHERS, FOR ANY PURPOSE WHATSOEVER, WITHOUT THE WRITTEN AUTHORIZATION OF SAVANNA ENERGY SERVICES CORP.

SAVANNA ENERGY SERVICES CORP.
SUITE 1800, 311-6TH AVENUE SW
CALGARY, ALBERTA T2P 3H2
P • 403-503-9990 F • 403-503-0654
WWW.SAVANNAENERGY.COM

SCALE: 1/8"=1'-0"
TITLEBLOCK: T96
TITLE: Rig Layout (477 m/1565 ft)
DRAWN BY: EPB
CHK'D BY:
AUTH'D BY:
CLIENT: DRILLING
RIG: 310
DATE: 06/25/09
DWG #: SV101L310LO
REV #: 1